

VX 7729/4-1/2" x 4" K Kit

For high performance commercial doors



Product features

- Maintenance-free slide bearings
- For hollow metal frames and wood doors
- UL listed for 180 minute fire door
- Easily adjustable in three dimensions (side +/- 3.0 mm (0.118"), height +/- 3.0 mm (0.118"), compression +/- 3.0 mm (0.118"))

Technical information

Detail	Value	
Load capacity	264.0 lbs	120.0 kg
Knuckle diameter	0.787 "	20.0 mm
Overall width	4.000 "	101.6 mm
Length (door part)	4.488 "	114.0 mm
Router bit diameter	3/4 "	24.0 mm
Collar ring diameter	1 "	30.0 mm
Material thickness	0.138 "	3.5 mm
Screws	#12 "	5.0 x 50.0 mm


Quality marks



Certification UL



Certification UL (Canada)

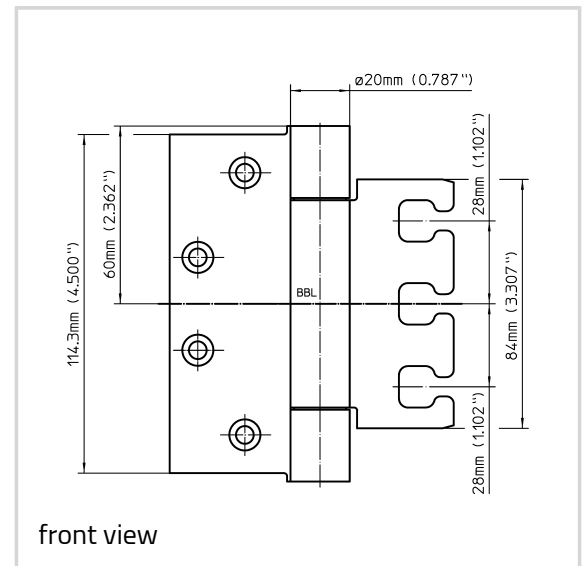

VARIANT VX - VX 7729/4-1/2" x 4" K Kit

Note

The load capacity mentioned above refers to the use of 2 hinges per door leaf (height : width ratio 2:1).

Receiver for wood and aluminum doors available upon request.

NRP version available upon request.

Function range



Fire Resistant



Smoke Resistant

Kit consists of

VX 7729/4-1/2" x 4" K

For high performance commercial doors

- For hollow metal frames and wood doors
- Maintenance-free slide bearings
- Easily adjustable in three dimensions (side +/- 3.0 mm (0.118"), height +/- 3.0 mm (0.118"), compression +/- 3.0 mm (0.118"))
- UL listed for 180 minute fire door

VX 7511 3D (incl. Cover plate)

For flush doors with steel frames/doors

Item

Finish(es)	Satin Stainless Steel (040)
OF-NR.	040
VPE	pack of 2
DIN	non-handed
Item No.	5 040782 0 04002
EAN	4015471113940

